




EN	Table of contents	1
	Instructions for use / assembly instructions	2
	Assembly	3 - 8
	Adjustment	9
	Dimensions	10 - 11
	Flow diagram	12
	Operation	13
	Spare parts	14 - 17
	Cleaning	18
	Test certificate	19
	Contact information	20
SV	Innehållsförteckning	1
	Bruksanvisning / Monteringsanvisning	2
	Montering	3 - 8
	Inställning av maxtemperatur	9
	Måttskiss	10 - 11
	Flödesschema	12
	Hantering	13
	Reservdelar	14 - 17
	Rengöring	18
	Testsigill	19
	Kontaktinformation	20




Focus
31823000 (RSK: 8227516)



Talis S² Variarc
14875000 (RSK: 8227158)



Metris
14888000 (RSK: 8227598)



Focus
31803000 (RSK: 8227395)

**Safety Notes**

- △ Gloves should be worn during installation to prevent crushing and cutting injuries.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The plumbing codes applicable in the respective countries must be observed.

Pressure and tightness test

- The mixer connections must be tested of tightness after installation.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa (1 MPa = 10 bar = 147 PSI)
Hot water temperature:	max. 60 °C
Thermal disinfection:	70 °C / 4 min
The product is exclusively designed for drinking water!	

Symbol description**Adjustment** (see page 9)

To adjust the hot water limiter.

**Dimensions** (see page 10)**Flow diagram**
(see page 12)**Operation** (see page 13)

Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.

**Spare parts** (see page 14)**Cleaning** (see page 18)**Test certificate** (see page 19)**Säkerhetsanvisningar**

- △ Handskar ska bäras under monteringsarbete för att undvika kläm- och skärskador.

Monteringsanvisningar

- Det måste undersökas om produkten har transportskador innan den monteras. Efter monteringen accepteras inga transport- eller ytskiktsskador.
- De installationsriktlinjer som gäller i länderna ska följas.

Tryck och täthetsprov

- Blandarens anslutningar skall täthetkontrolleras efter installationen.

Tekniska data

Driftstryck:	max. 1 MPa
Rek. driftstryck:	0,1 - 0,5 MPa
Tryck vid provtryckning:	1,6 MPa (1 MPa = 10 bar = 147 PSI)
Varmvattentemperatur:	max. 60 °C
Termisk desinfektion:	70 °C / 4 min
Produkten är enbart avsedd för dricksvatten!	







Symbolförklaring**Inställning av maxtemperatur** (se sidan 9)

Ställa in varmvattenregleringen.

**Måtten** (se sidan 10)**Flödesschema**
(se sidan 12)**Hantering** (se sidan 13)


Hansgrohe rekommenderar att den första halvlitern inte används som dricksvatten på morgonen eller efter längre perioder utan användning.

**Reservdelar** (se sidan 14)**Rengöring** (se sidan 18)**Testsigill** (se sidan 19)

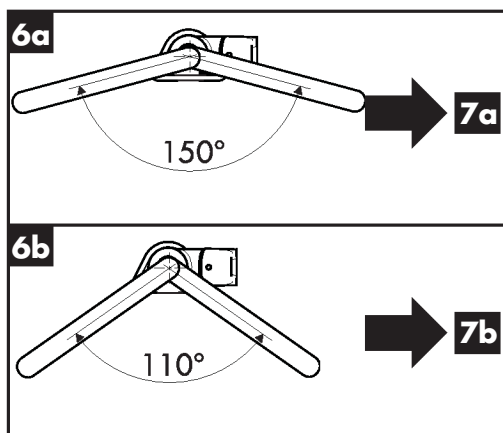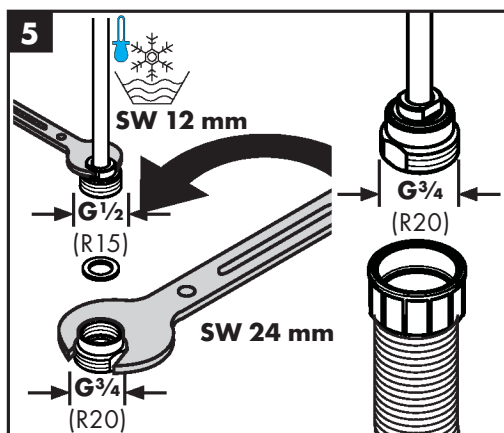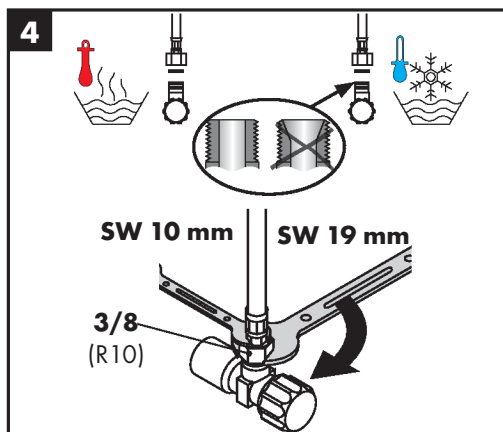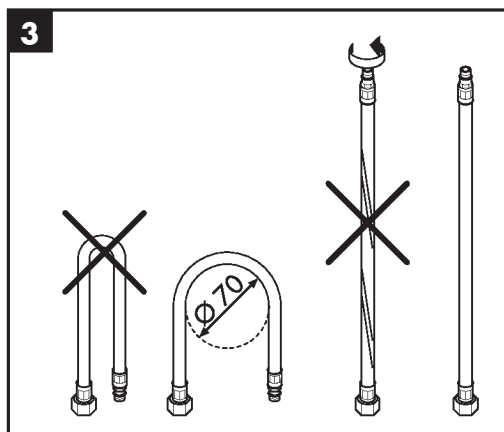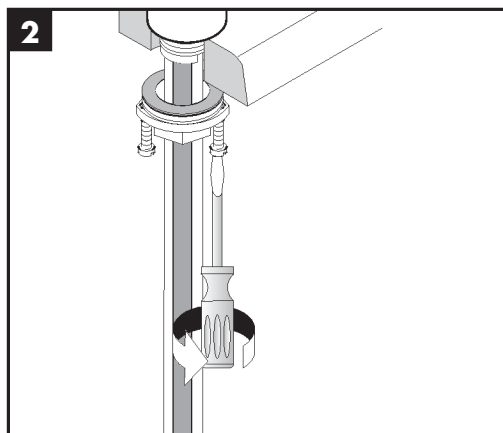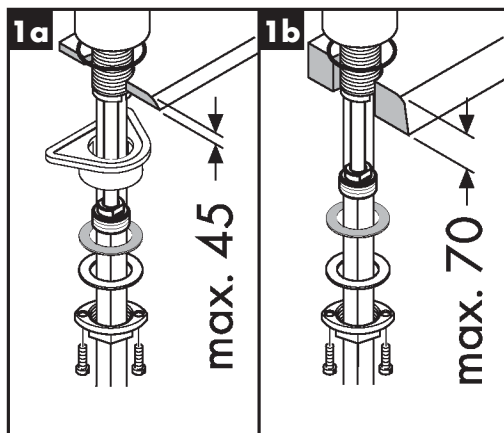








7a






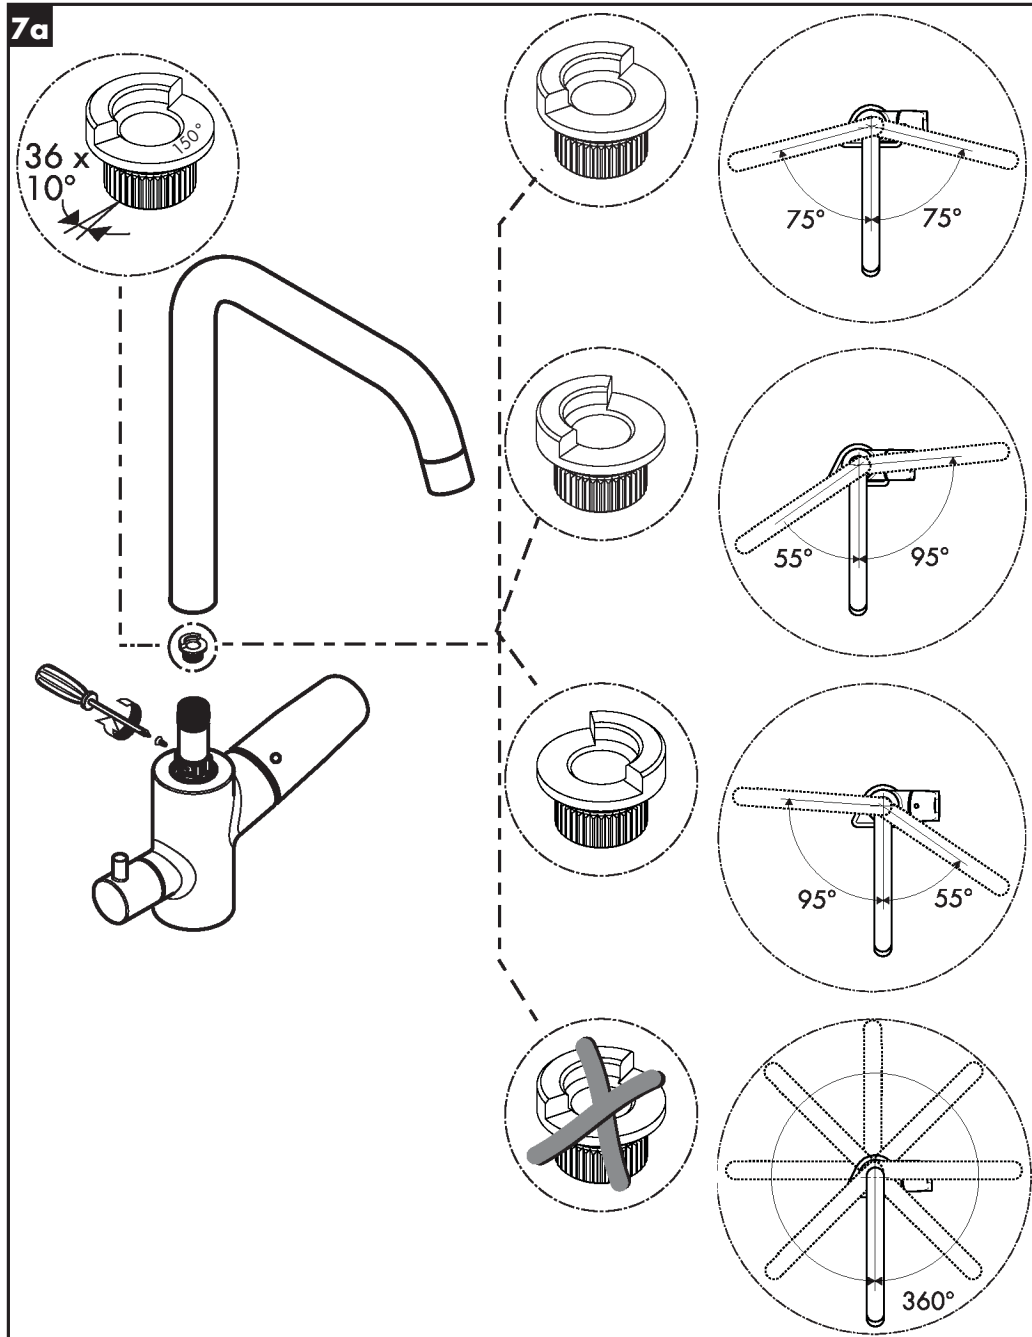














7b

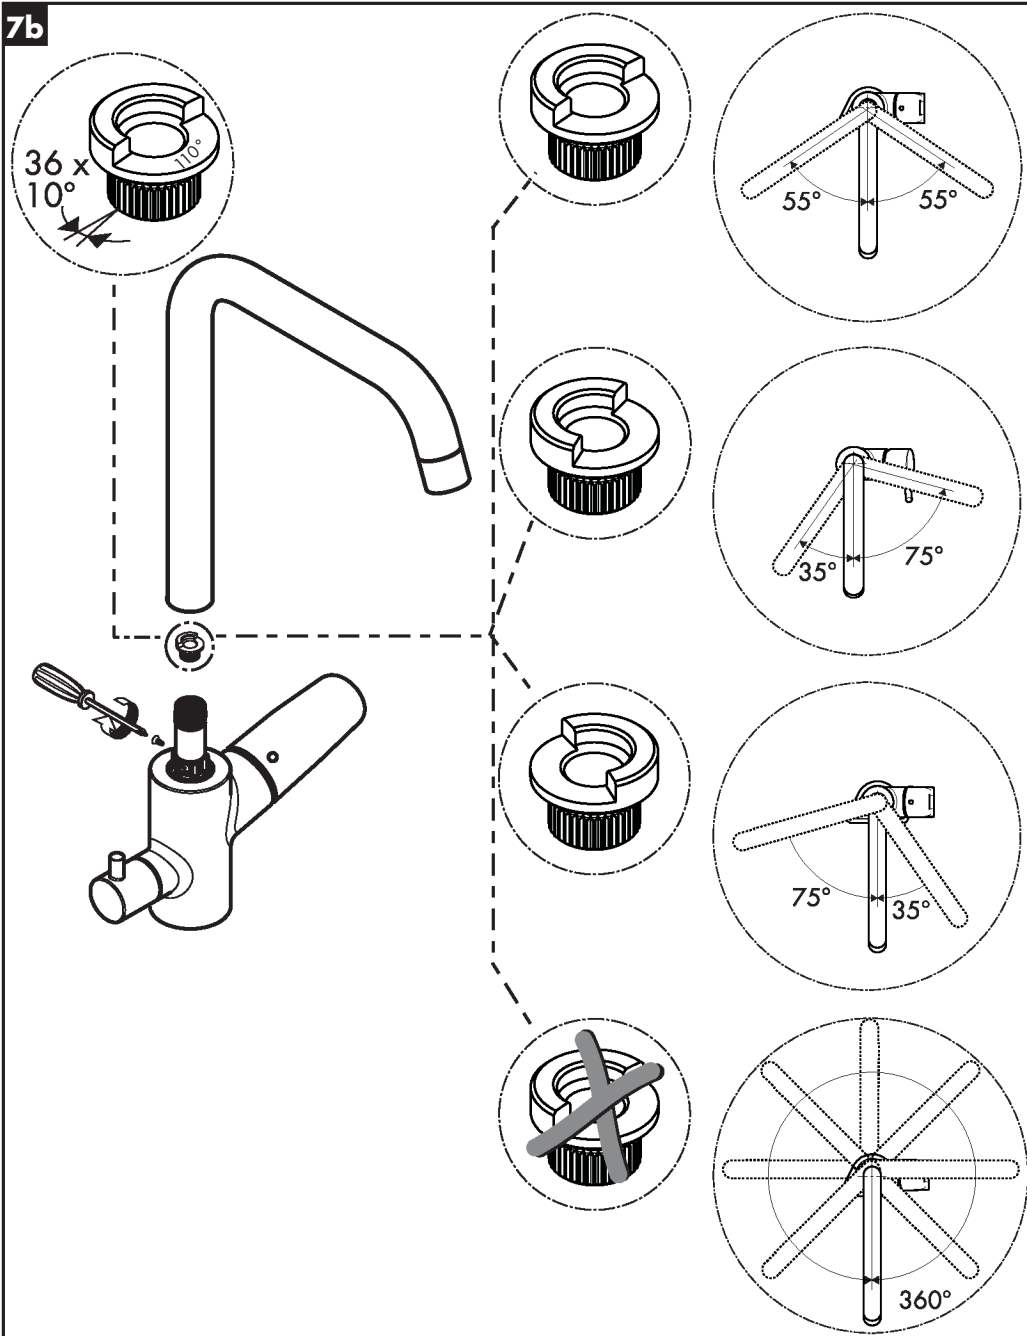

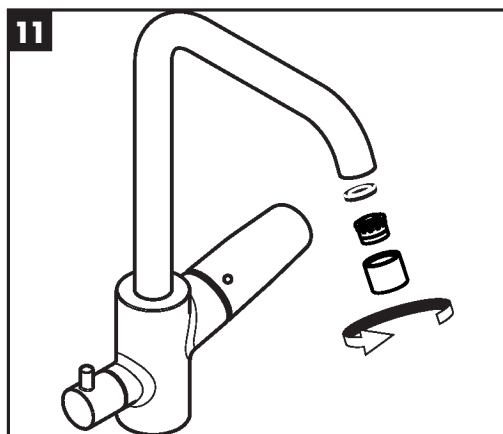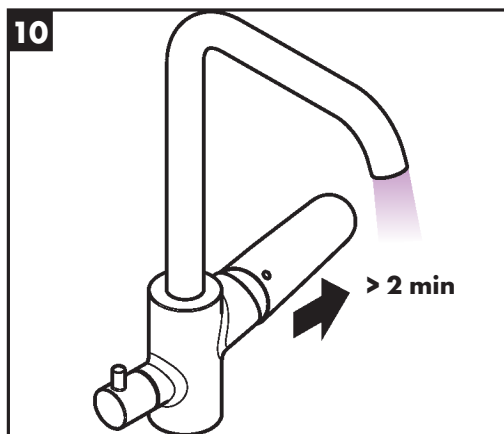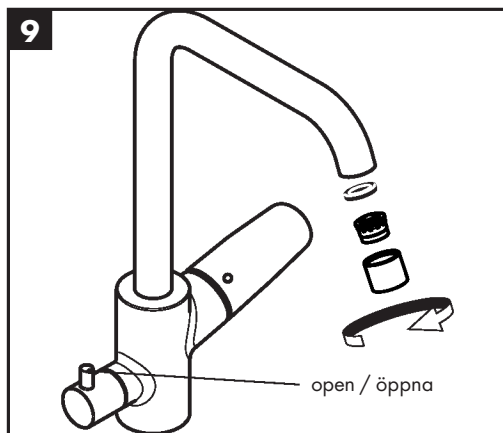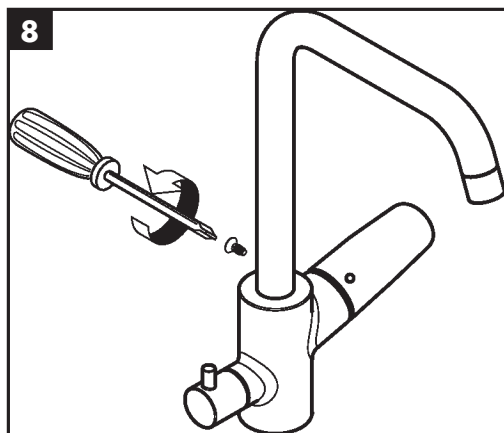

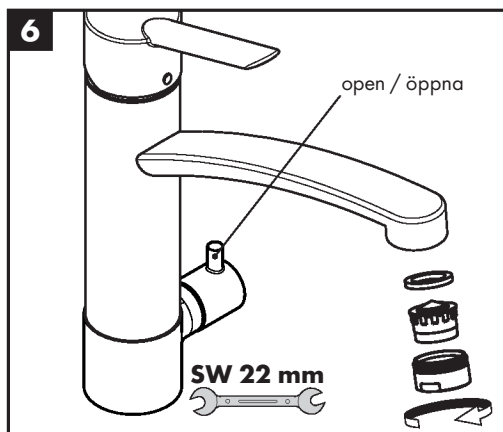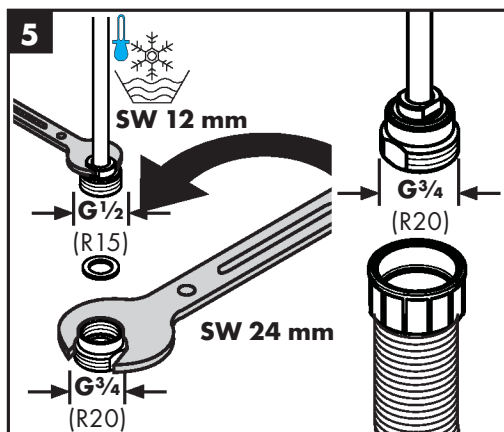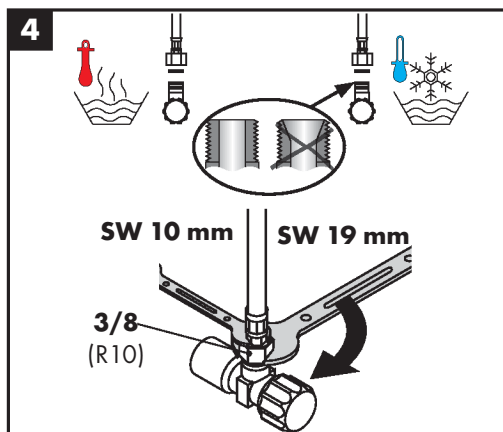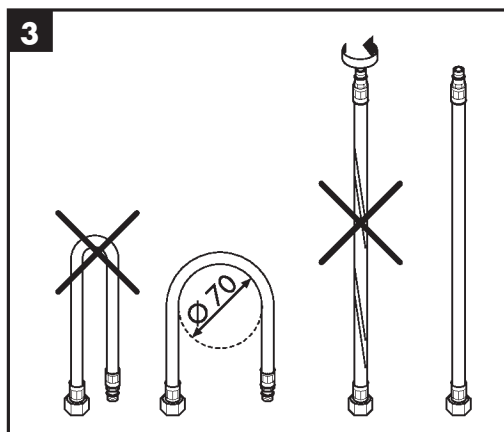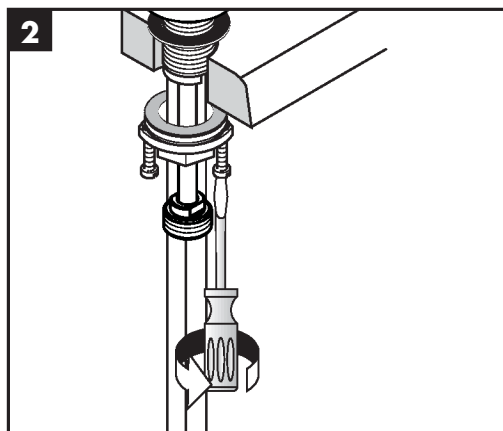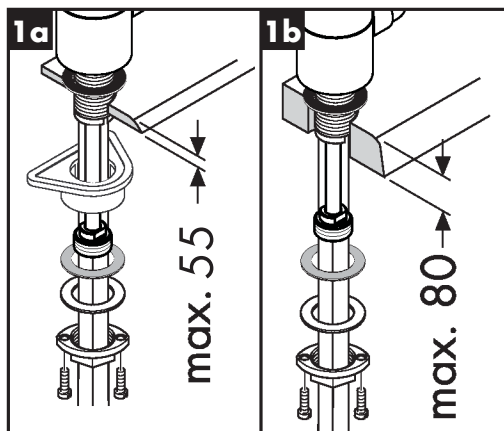

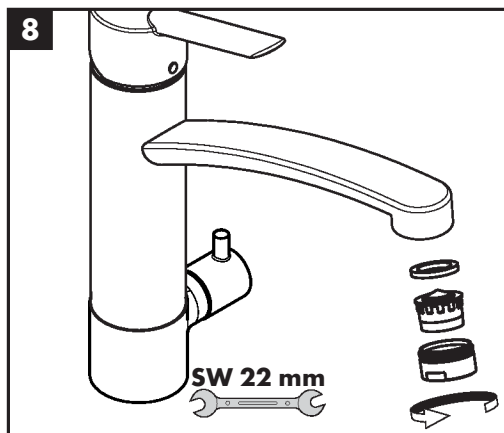
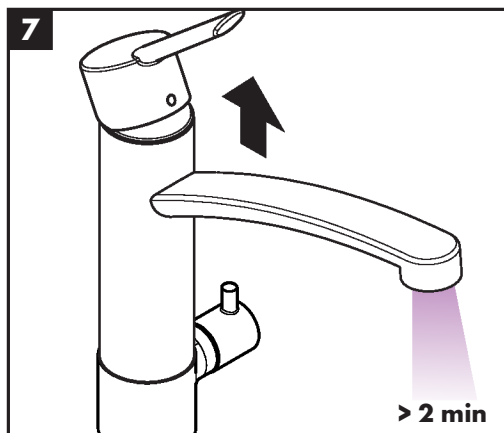


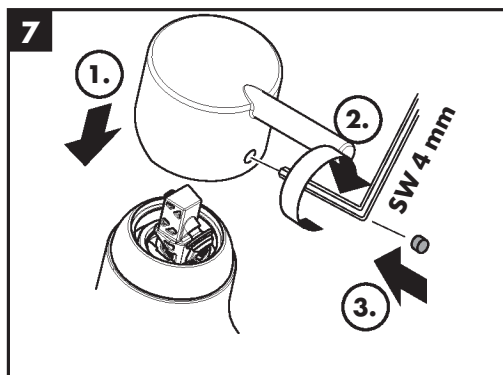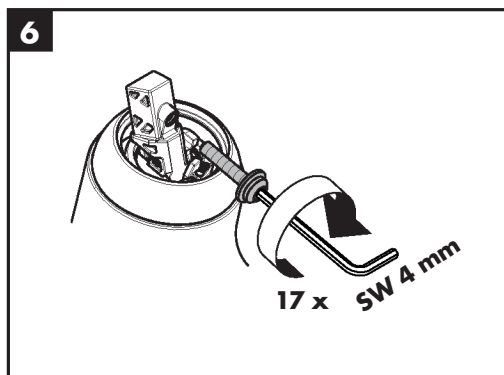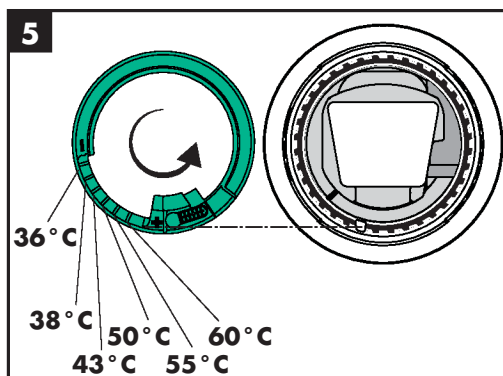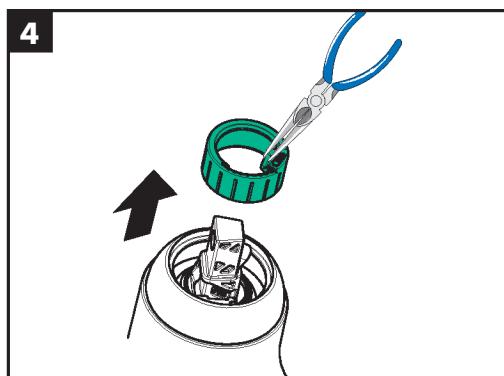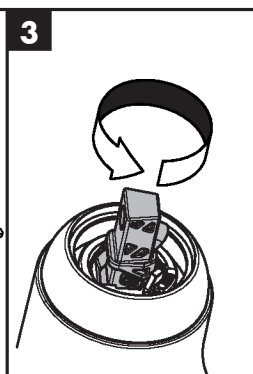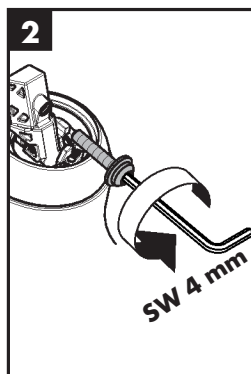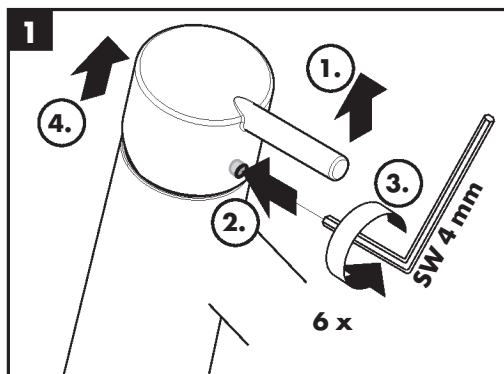





Focus

31823000

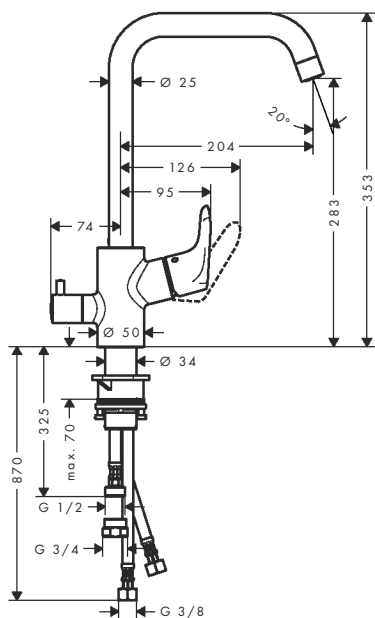

Talis S² Variarc



14875000

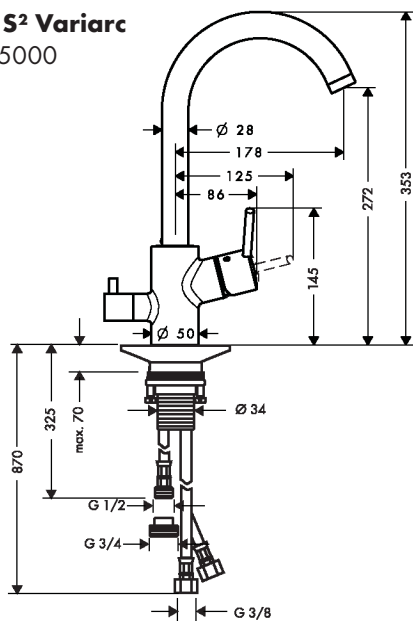





Metris

14888000

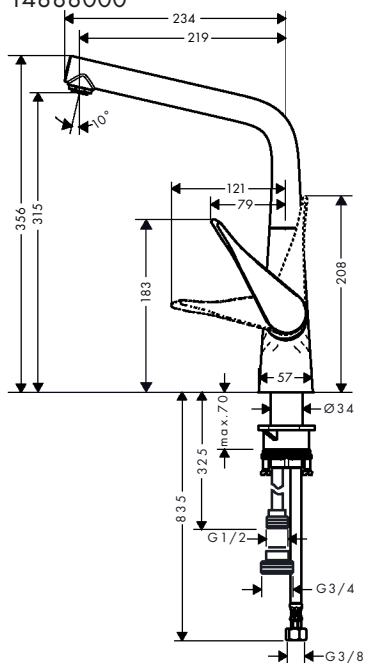

Focus


31803000

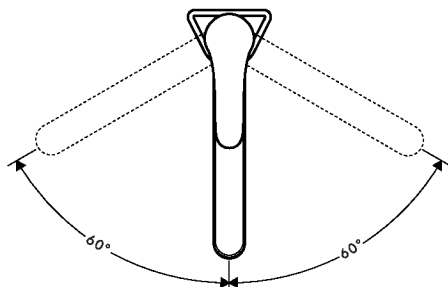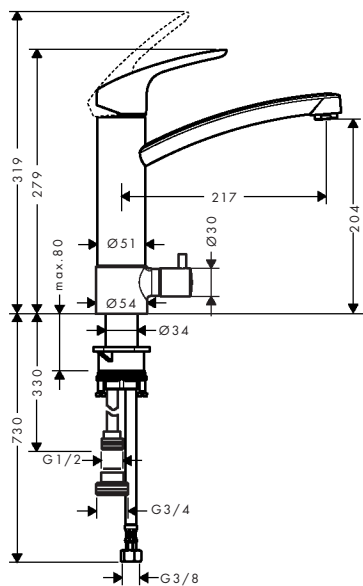




Focus

31823000

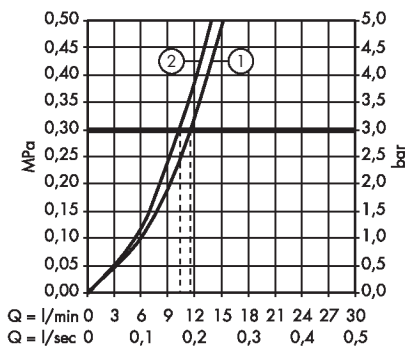


Metris

14888000

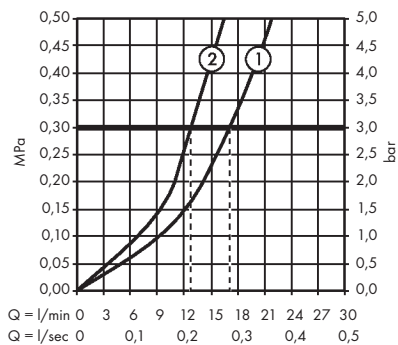



Focus

31803000

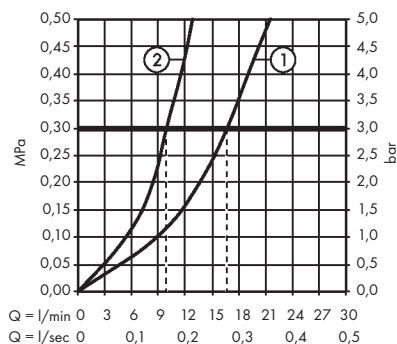


Talis S² Variarc

14875000

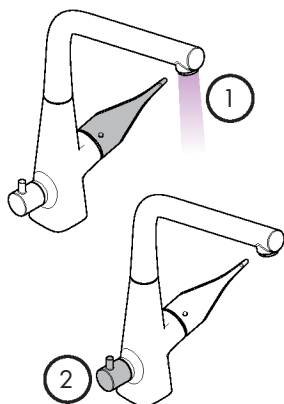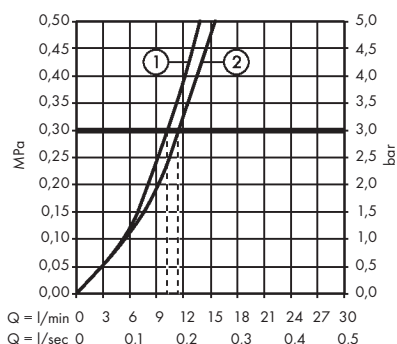





Focus 31823000 / Talis S² Variarc 14875000 / Metris 14888000

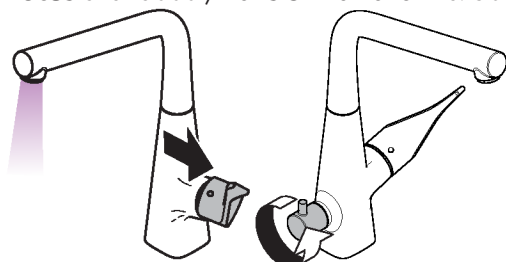


open / öppna

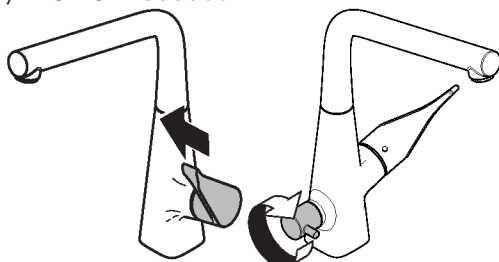

close / stänga




hot / varmt




cold / kallt


Focus 31803000

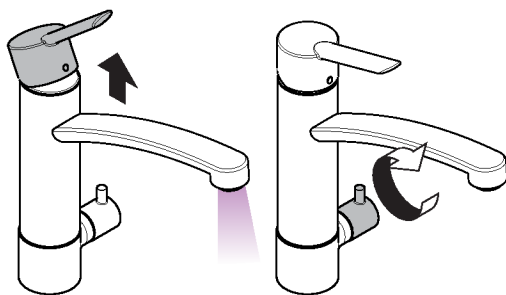


open / öppna

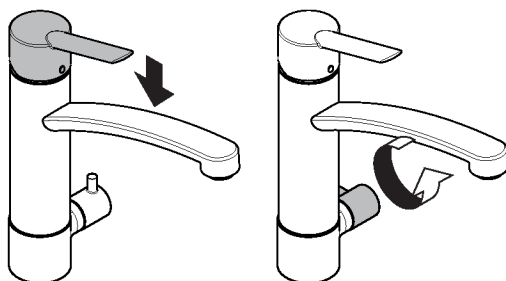

close / stänga



hot / varmt




cold / kallt




Focus

31823000

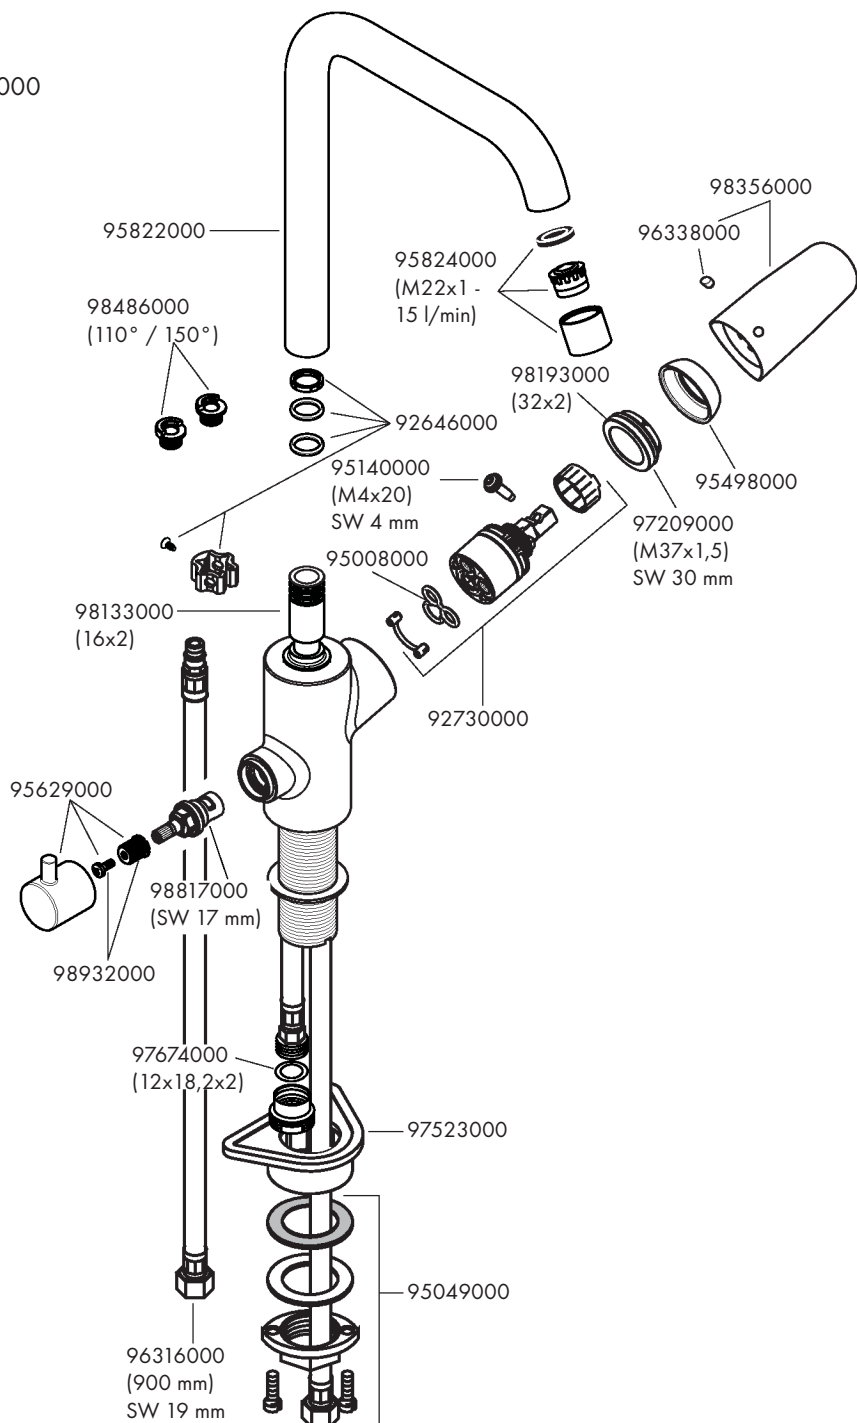

Talis S² Variarc


14875000

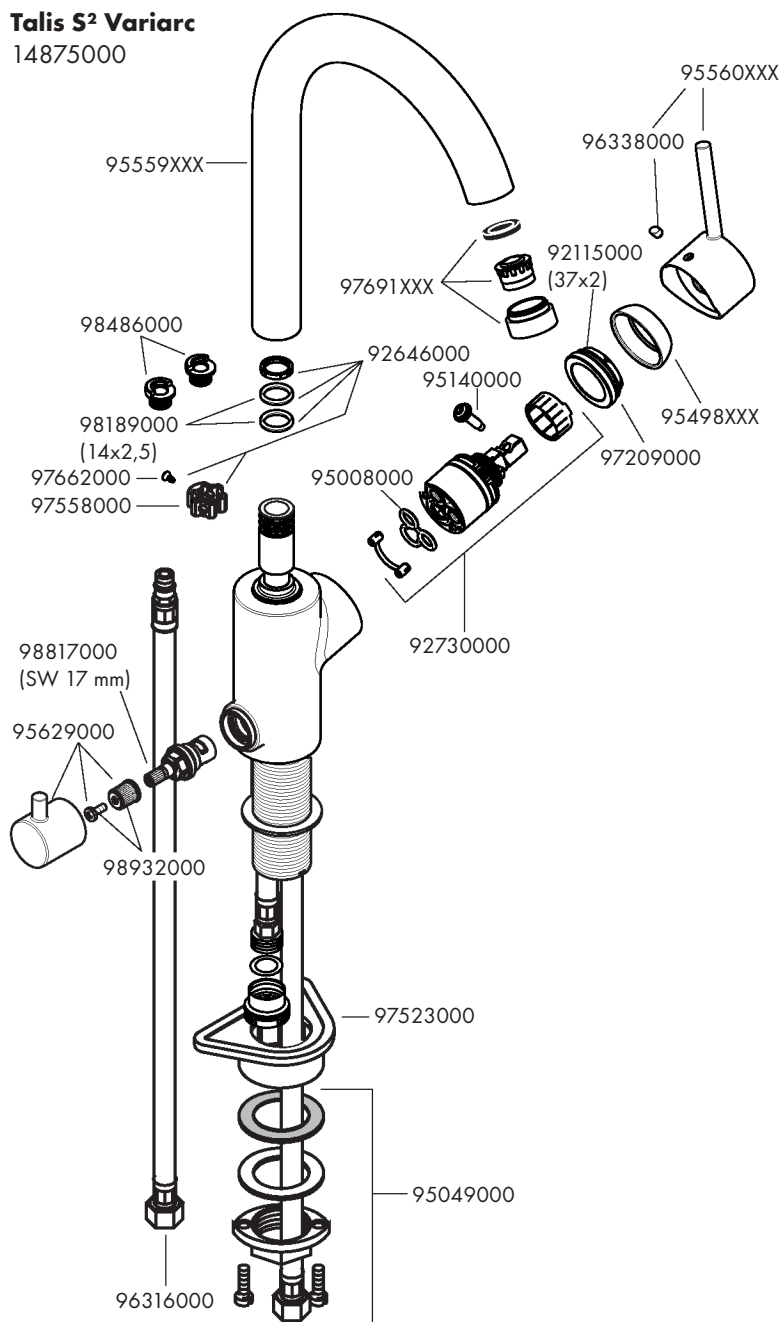




Metris

14888000

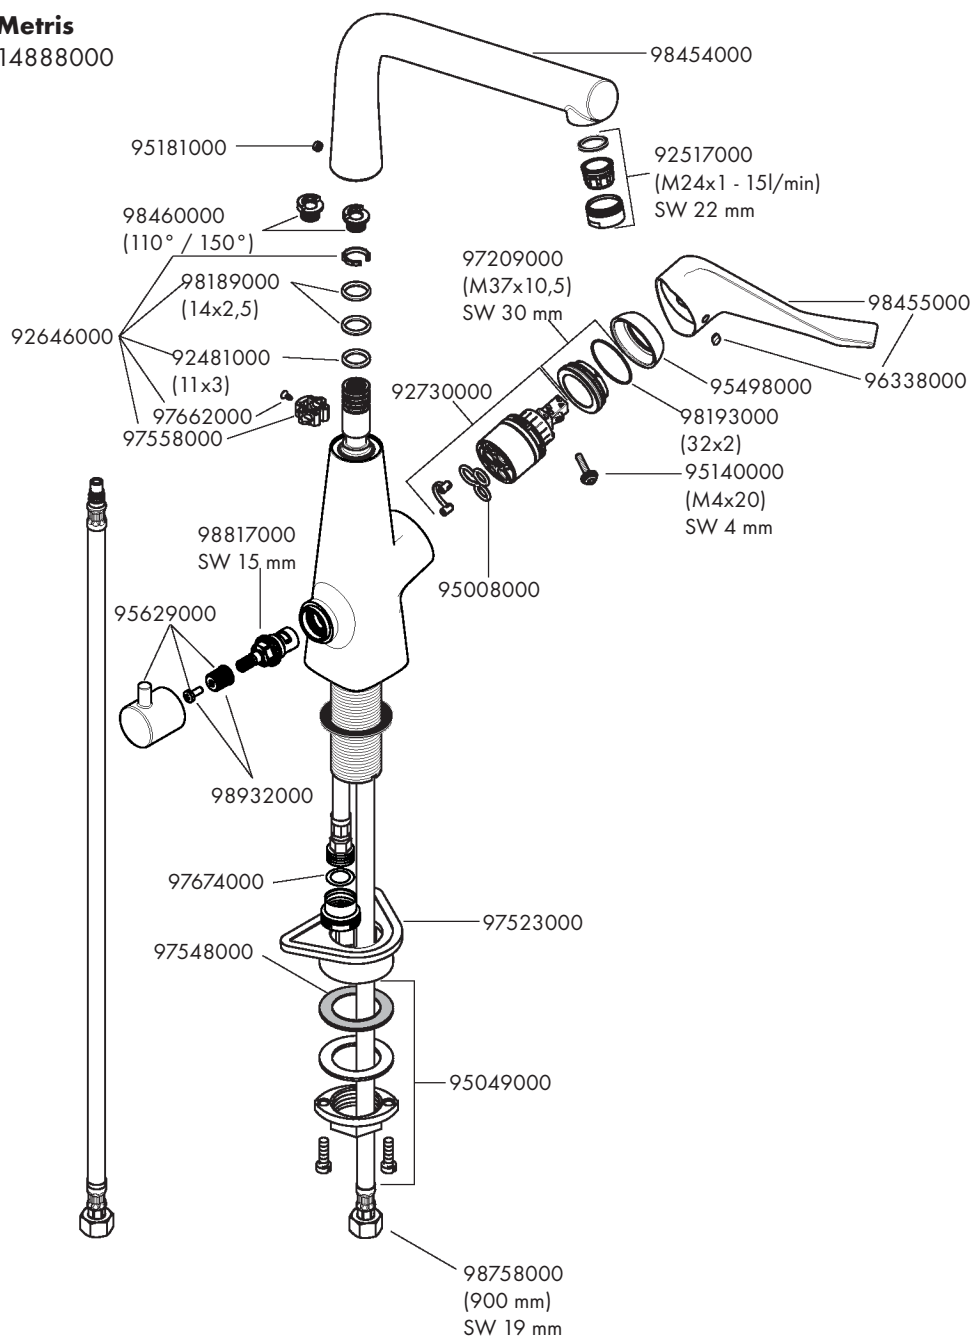


Focus
31803000

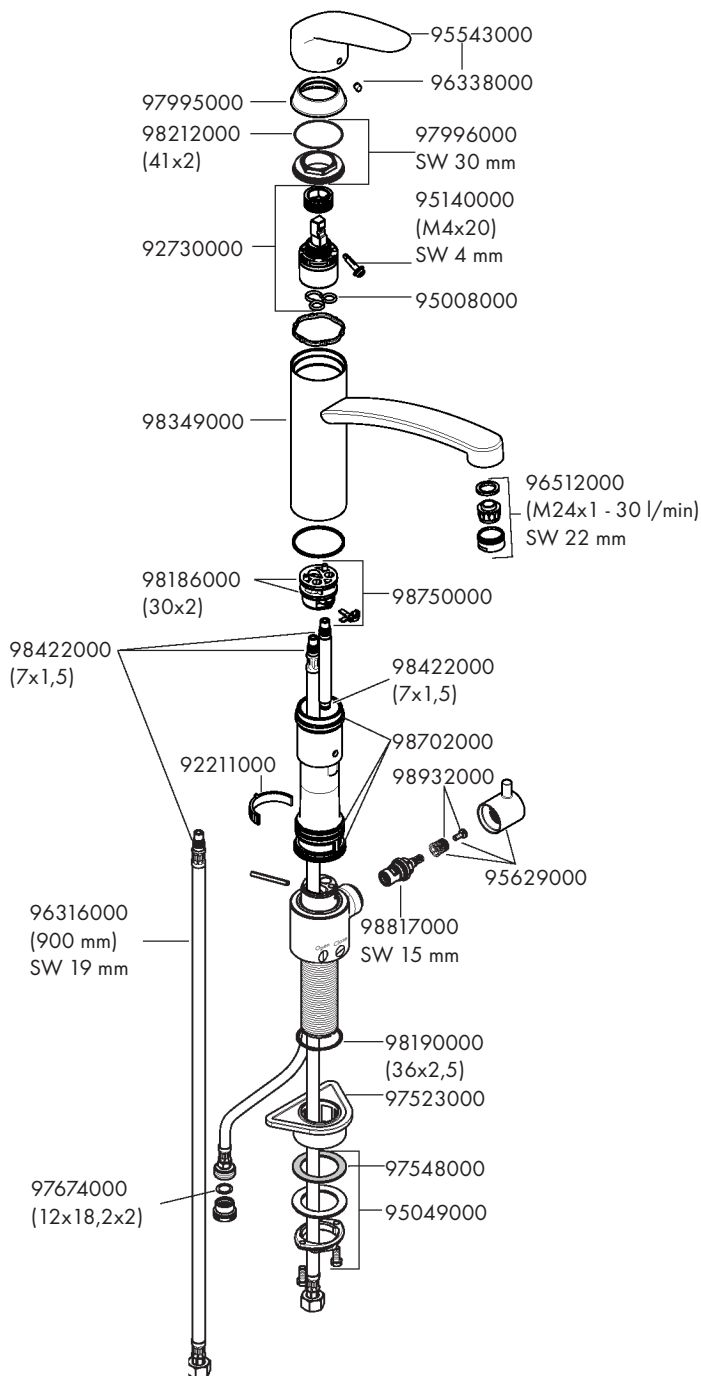



[www.hansgrohe.com/
cleaning-recommendation](http://www.hansgrohe.com/cleaning-recommendation)



[www.hansgrohe.com/
cleaning-recommendation](http://www.hansgrohe.com/cleaning-recommendation)



[www.hansgrohe.com/
cleaning-recommendation](http://www.hansgrohe.com/cleaning-recommendation)



[www.hansgrohe.com/
cleaning-recommendation](http://www.hansgrohe.com/cleaning-recommendation)

EN Cleaning recommendation / Warranty / Contact

SV Rengöringsrekommendationer / Garanti / Contacto



P-IX	DVGW	SINTEF	NF	STF	ETA	 GODKENDT TIL DRIKKEVAND
14875000	PA-IX 19374/IA			X	X	
14888000		X		X	X	04/00134
31803000		X		X	X	
31823000				X	X	

Hansgrohe SE

DIN 4109-1

PA-IX 19374/IA


Products

